HEADPHONE & MICROPHONE

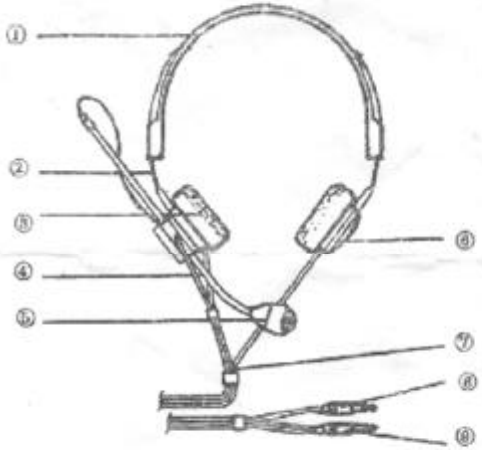

PARTS NAME

① HEAD BAND
② CLAMP HOLDER
③ EAR CUSHION
④ CONTROL ROD
⑤ MIC
⑥ SPEAKER CASE
⑦ CORD
⑧ MIC 3.5PLUG
⑨ PHONES ø3.5P

HEADPHONES SPECIFICATION

Frequency Range .....20—18.000Hz
Impedance ..... 320hm±5%
Maximum Power Input 100mw
Sensitivity ··· 96dB S.P.L at 1KHZ ± 2%
Jack ..... 3.5mm Stereo
Length of Cord .....1.8m ± 3%

MIC SPECIFICATION

Out Impedance ..... <2kΩ
Frequency Range ..... 50 ~ 12500HZ
Operating Voltage ..... D.C 1.5 ~ 12V
Sensitivity .....58 ± 2db